

## SC01.3019 - HDMI Extender 60m



### Key Features


- Transmits HDMI and IR up to 60m
- Uses a single CAT5e/6 cable
- Supported resolutions: 1080p/1080i/720p/576p/480p/480i
- Supports PCM, Dolby Digital™ and DTS Digital Surround™
- Infra-Red return path for source control
- Bandwidth 6.75Gbps, deep colour 36 bit, 3D
- Plug & Play with no settings or adjustments
- Powered both ends by 5V adaptor
- Supplied with Infra-Red cables

### Description

The SC01.3019 extends the distance between the HDMI source and display using a single CAT5e/6 cable by up to 60m.

Uncompressed high definition HDMI signals are transmitted without signal loss and automatically adjusts for CAT5 cable length. Infra-Red is also provided for controlling the device.

The SC01.3019 is supplied as a pair and contains all the necessary infra-red cables. These units are ideal for home, office and general retail display screens.

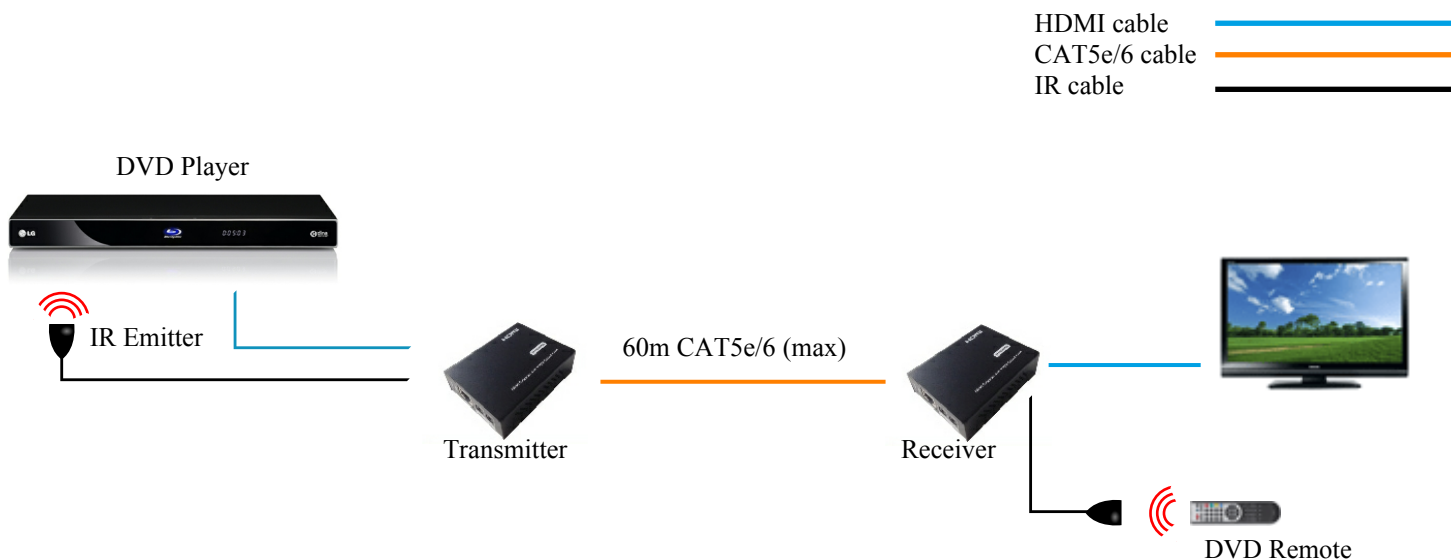

Operating temperature	-5 to +35°C (+23 to +95°F)
Operating humidity	5 to 90% RH (no condensation)
Output video bandwidth	6.75Gbps
IR wavelegnth & frequency	940nm / 38 - 56KHz
Input video signal	0.5 - 1.0 Volt p-p
Input DDC signal	5 Volt p-p (TTL)

Supported video format	Full HD 1080p
Video output	HDMI
Supported audio format	DTS Master Audio, Dobby True HD
Transmission distance	60m over CAT5e/6 solid cable
Power consumption	Pair 3W (max)
Dimensions (mm)	(L)115 x (W)70 x (H)35
Net weight	260g Pair