

2, 4 & 8 Way HDMI Splitter/Extender over CAT6



Product Code	Description
SC02.7202	2-Port Splitter
SC02.7212	2-Port Splitter with local HDMI
SC02.7204	4-Port Splitter
SC02.7214	4-Port Splitter with local HDMI
SC02.7218	8-Port Splitter with local HDMI

All supplied in kits including receivers


Key Features

- Distributes Full HD over 50m CAT6 cable
- Supports resolutions up to 1080p@60Hz
- Infra-Red return path for source control
- PCM, Dolby Digital and DTS Digital Surround
- Available in 2, 4 and 8 port
- Optional local HDMI output

Description

The SC02.7000 series splitters distribute Full HD 1080p to either 2, 4 or 8 receivers over a single CAT6 cable up to 50m from the splitter. Each receiver passes infra-red back for controlling the source device using the IR emitter supplied and some models have a local HDMI loop-through for connecting a local screen close to the splitter. Other than setting your EDID preferences using DIP switches, there are no adjustments required.

These splitters are ideal for distributing Full HD around the home, office or retail displays.

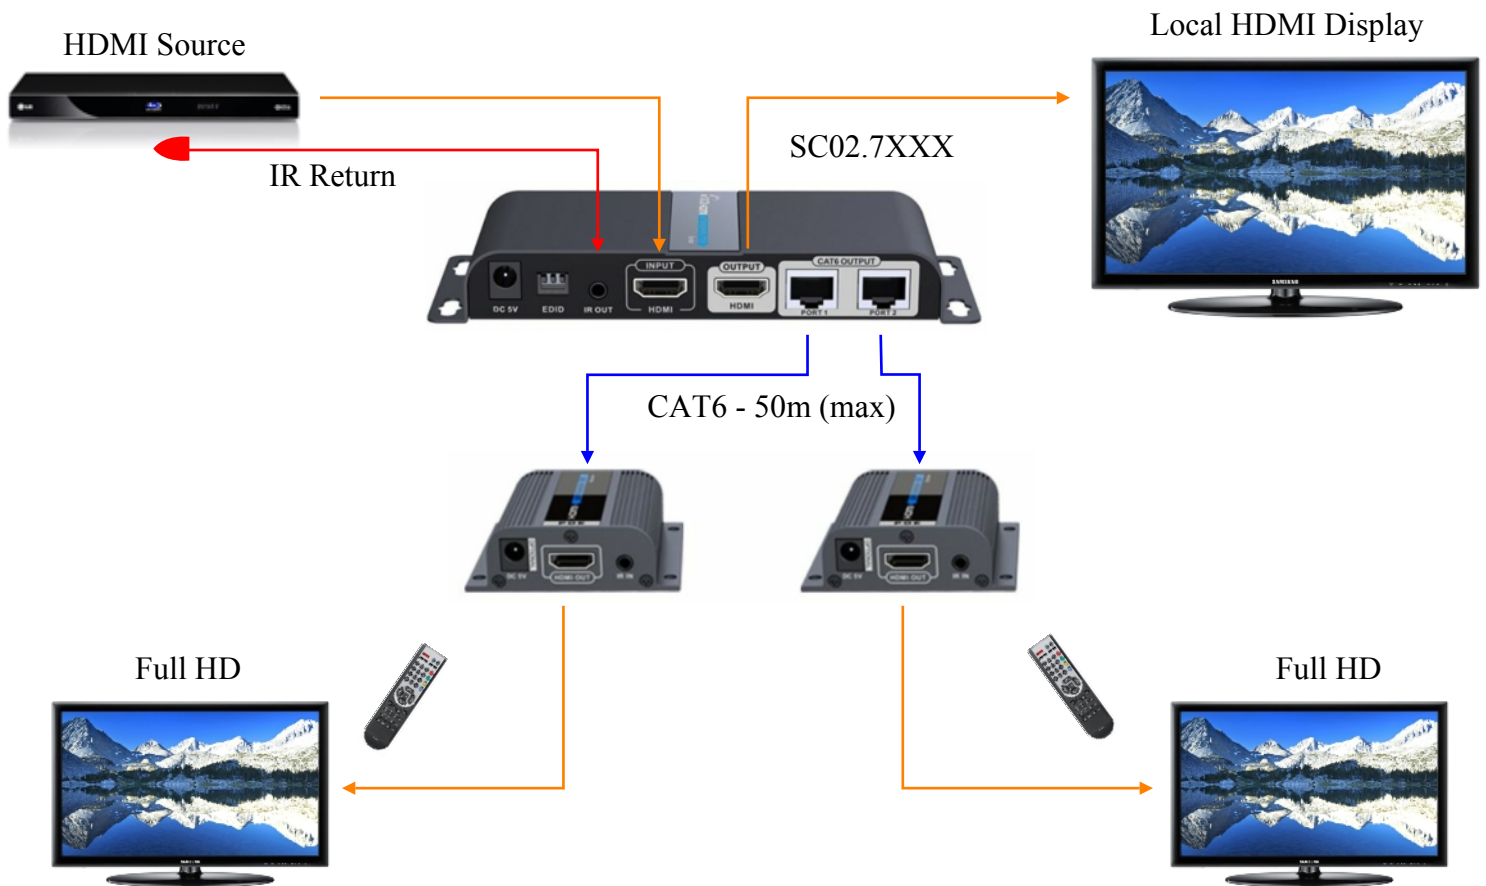

Specifications

1:2 HDMI Splitter/Extender

Specifications	
Operating Temperature	-5 to 35°C
Operating Humidity	5 to 90%RH with no condensation
Input video signal	1 x HDMI Type-A Socket
Looped video signal	1 x HDMI Type-A Socket (SC02.7212 only)
Supported Video Formats	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K HDMI 1.3, HDCP 1.2
Video Output	2 x RJ45 Sockets
Infra-Red	Supports IR 20 - 60Khz - 3.5mm Jack Socket
Digital Audio	LPCM Dolby 5.1, Dolby 7.1, DTS 5.1, DTS HD
Power Consumption	10 Watts (max), Uses DC 5V/2A Power Supply
Dimensions (LxWxH)	Splitter 158 x 62 x 22 - Receiver 72 x 67 x 23

1:4 HDMI Splitter/Extender

Specifications	
Operating Temperature	-5 to 35°C
Operating Humidity	5 to 90%RH with no condensation
Input video signal	1 x HDMI Type-A Socket
Looped video signal	1 x HDMI Type-A Socket (SC02.7214 only)
Supported Video Formats	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K HDMI 1.3, HDCP 1.2
Video Output	4 x RJ45 Sockets
Infra-Red	Supports IR 20 - 60Khz - 3.5mm Jack Socket
Digital Audio	LPCM Dolby 5.1, Dolby 7.1, DTS 5.1, DTS HD
Power Consumption	15 Watts (max), Uses DC 5V/3A Power Supply
Dimensions (LxWxH)	Splitter 190 x 96 x 22 - Receiver 72 x 67 x 23

1:8 HDMI Splitter/Extender

Specifications	
Operating Temperature	-5 to 35°C
Operating Humidity	5 to 90%RH with no condensation
Input video signal	1 x HDMI Type-A Socket
Looped video signal	1 x HDMI Type-A Socket
Supported Video Formats	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K HDMI 1.3, HDCP 1.2
Video Output	8 x RJ45 Sockets
Infra-Red	Supports IR 20 - 60Khz - 3.5mm Jack Socket
Digital Audio	LPCM Dolby 5.1, Dolby 7.1, DTS 5.1, DTS HD
Power Consumption	24 Watts (max), Uses DC 5V/3A Power Supply
Dimensions (LxWxH)	Splitter 276 x 96 x 22 - Receiver 72 x 67 x 23