

SC03.4101 - 4:1 HDMI Switch, 4K, HDR



Ordering information

Product Code	Description
SC03.4101	4:1 HDMI Switch, UHD 4K, HDR

Key Features


- Switches any 4 x Inputs to 1 x Output
- Resolutions: 4K@60Hz YUV 4:4:4
- HDMI 2.0, HDCP 2.2, ARC, HDR
- Supports Dolby™ True HD and DTS Master Audio
- Output Audio is Extracted to 2CH RCA and SPDIF 5.1
- Bandwidth: 18Gbps, HDR (High Dynamic Range)
- Control: Front panel buttons and Infra-Red Control
- Suitable for security, gaming, TV and Sky Q




Description

The AV03.4101 switches 4 HDMI inputs to 1 HDMI Output, with quick and effortless setup and supports Ultra HD 4K@60Hz resolutions. With IR, push button control this unit will fit perfectly into any scenario where you have 4 x UHD sources and only 1 UHD screen.

The front panel LEDs make it easy to see which input is currently active at any given time. HDMI 2.0 support will ensure a clear high quality image output every time. Features also include extracted audio outputs in 2 channel analogue and SPDIF 5.1, mixed audio in by pass mode and ARC.

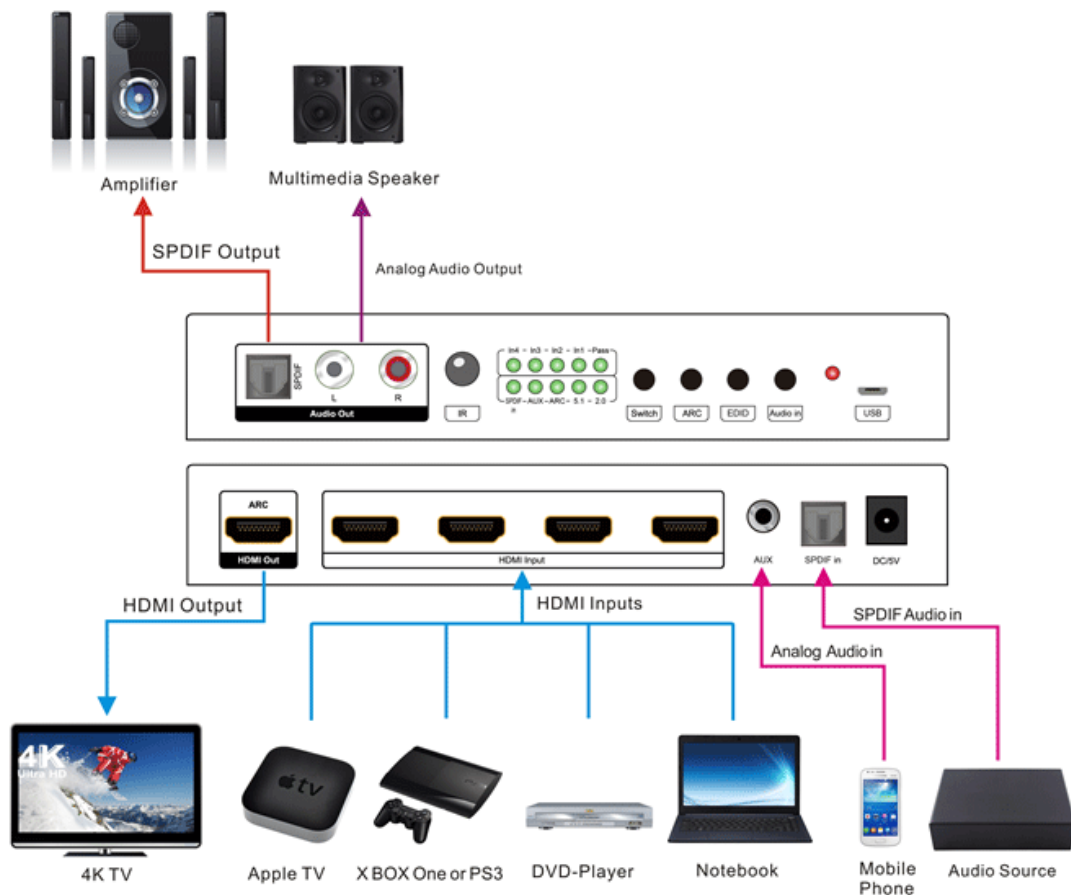

Remote Control Description

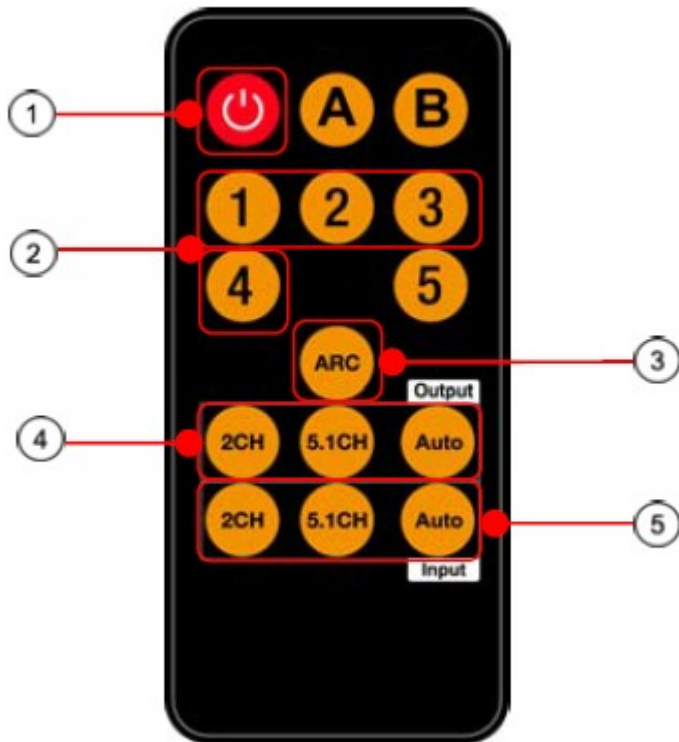

- ① Power on/off
- ② HDMI sources(1~4)
- ③ ARC on/off
- ④ Audio select button by EDID
- ⑤ Mix audio input select button

Specification

HDMI Input Resolution	: 4K@60Hz YUV 4:4:4
HDMI Compliance	: HDMI 2.0 and HDCP 2.2, HDCP 1.4, (Auto)
Maximun Transfer Rate	: 18Gbps
Function	: ARC, HDR10, CEC (Input Only)
3D	: Not Supported
HDMI Input Cable Length	: 20m @ 1080p or 10m @ 4K or 3m @ 4K HDR (AWG24)
HDMI Output Cable Length	: 20m @ 1080p or 10m @ 4K or 3m @ 4K HDR (AWG24)
Supported Audio	: Audio: Dolby Digital™ and DTS Digital Surround™
Power	: DC5V/1A
Power Consumption	: 5W
Mean Time Between Failure (MTBF)	: 30000 Hours
Working Temperature	: 0 ~ 60°C
Storage Temperature	: -10 ~ 70°C
Humidity	: 0 ~ 90% (no condensation)
Dimensions (L) x (W) x (D)mm	: 178 x 84 x 28
Weight	: 230g