

SC01.9010 - HDMI Extender, Wall Plate




Key Features

- Supports resolutions up to 1080p/60Hz
- Uncompressed Lossless Video
- HDMI V1.3, HDCP 1.2
- Cable Type: UTP/STP CAT6/6a/7
- Transmission Distance of 40m
- Supports IR signals 20 ~ 60KHz
- Looped HDMI Output
- Single Gang UK Wall Box

Description

The SC01.9010 is the smart solution for transmitting lossless HDMI signals over RJ45 UTP/STP Cat.6/6A/7 cables to maximum distance of 40 meters. Each end is powered using a 120-240V supply at the rear of the plate.

The product supports Full HD resolutions up to 1080p and HDCP, stereo audio, IR signal for remote controls. The elegance of the finishing touches and the sophisticated design fits perfectly with the other furnishing elements. These units are designed to fit neatly into a UK standard size Single Gang back box 32mm deep.

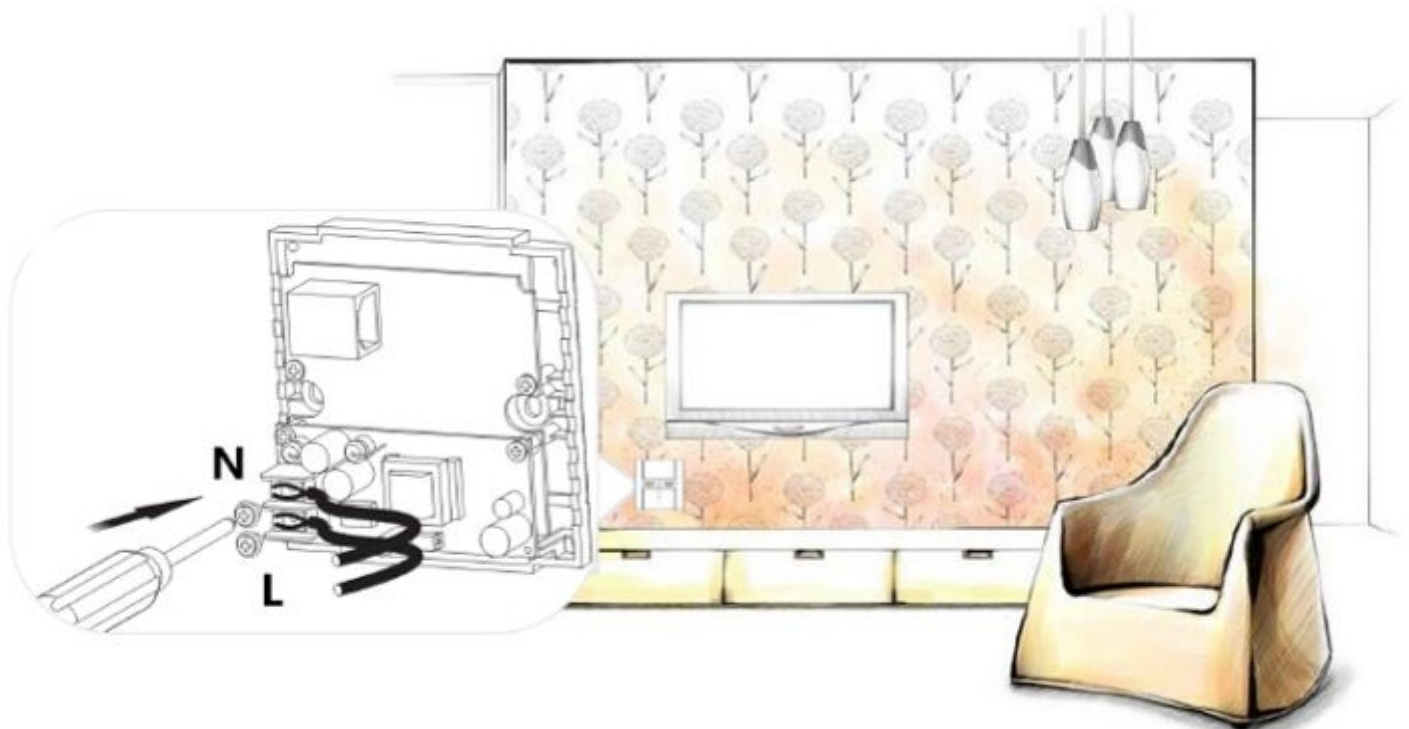

SC01.9010 - HDMI Extender, Wall Plate

Specification

Supported Resolution	480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz
HDMI Compliance	HDMI 1.3 and HDCP 1.2
Maximun Transfer Rate	10.2Gbps
Transmission Length	40m
HDMI Input Cable Length	≤10m(AWG24)
HDMI Output Cable Length	≤10m(AWG24)
IR Remote	Supports IR passback with 20~60KHz frequency
Transfer Method	Over UTP/STP CAT6/6a/7
Connector	RJ45
Electrostatic Protection	1a Contact discharge level 3, 1b Air discharge level 3, Standard: IEC61000-4-2
Power	110-240V AC
Power Consumption	TX:>2W RX:>2W
Mean Time Between Failure (MTBF)	>30000 Hours
Working Temperature	0 ~ 50°C
Storage Temperature	-10 ~ 70°C
Humidity	0 ~ 90% (no condensation)
Dimensions (L) x (W) x (D)mm	86 x 86 x 37
Colour	White